



TWENTE CHAIN

- Horizontal and vertical transport
- Very competitive price level
- Directly from stock
- Custom made possible
- Equivalent of LF1873

Characteristics

Material* POM-LF with stainless steel or steel base chain

Pith 19.1 mm

Width 82.6 mm

Min. radius 356 mm

Height rubber 29 mm

Quantity 4 rubber flaps

Max F 2.000N (SS)


Max F 4.000 (Steel)

Temp. -40°C tot +80°C

Colour* Orange brown

Package 3,05 m (1 ft)

* On request, the chain can be produced in a different colour or from a different material.

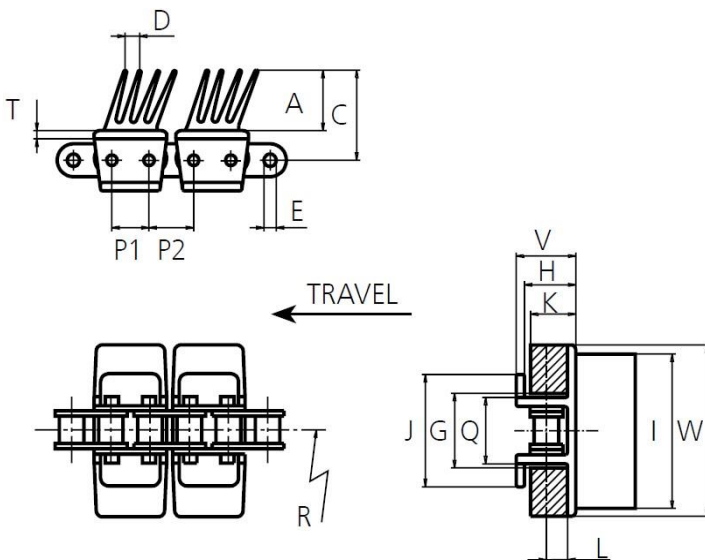

A		C		D		E		G		H		I(K325)		W(K325)	
Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In
29.0	1.14	44.3	1.74	9.0	0.35	5.1	0.20	34.9	1.37	25.0	1.02	75.0	2.95	82.6	3.25

J		K		L		P1		P2		Q		T		V	
Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In	Mm	In
54.4	2.14	20.6	0.81	10.3	0.41	18.1	0.71	20.1	0.79	31.8	1.25	5.0	0.20	30.0	1.18

Morskate Drive Technology

Oosterveldsingel 47A | NL-7558 PJ Hengelo, The Netherlands
 T +31 74 760 11 11 | info@morskatedrivetechnology.com
 www.morskatedrivetechnology.com

Morskate®

Gedreven door techniek.